

**Light sources:** LED with various emission colours, Secondary optics - polymer lenses with various light distribution angles.

**Power supply / Ballast:** Included in the scope of supply

**Design:** Body - extruded anodized aluminium coated with weather-resistant powder materials.


The luminaire is without through wiring (type 1) and is equipped with a 1-meter cable and a sealed connector (terminal block) for connection. A modification with through wiring is also available (type 2). The through-wired modification is equipped with two cable cuts 200 mm long each and with one sealed connector for daisy chain. The LED pitch - 80 mm.

**Diffuser:** Protective glass - tempered heat-and impact-resistant, thickness - 4 mm.

**Coating:** Powder coated. Coating in any colour from the standard colour range (p. 213).

**Connection:** The max. section of the connected conductors is up to 4 mm<sup>2</sup>. Electric shock protection class - 2.

## Facade MidiLine



Code	Max Power, W	Luminous flux, lm 3000K\4000K\A\R\G\B	X, mm	Length, mm	Weight, kg
MIDIline/1(2) 400 3K\4K\A\R\G\B - M/W/WW/O/OWAS	7	623\623\203\223\380\94	80	398	0,75
MIDIline/1(2) 800 3K\4K\A\R\G\B - M/W/WW/O/OWAS	13	1246\1246\406\446\760\188	80	798	1,48
MIDIline/1(2) 1200 3K\4K\A\R\G\B - M/W/WW/O/OWAS	19	1870\1870\609\669\1140\282	80	1198	2,2


Code	Power, W	Luminous flux, lm	X, mm	Length, mm	Weight, kg
------	----------	-------------------	-------	------------	------------

**LED colour codes:**  
 3K - white 3000K  
 4K - white 4000K  
 5K - white 5000K  
 A - yellow  
 R - red  
 G - green  
 B - blue

**Lens light distribution codes:**  
 OWAS - flood asymmetrical  
 O - elliptic optics 40x15°  
 M - medium 30-32°  
 W - wide 42-46°  
 WW - extremely wide 60-62°

Installed using standard brackets G-CRON (Г-КРОН) (see p. 208, ordered separately).  
 In case of through-wired luminaires installation, luminaire 1 shall be installed at the end of the circuit; otherwise, it is required to install special plugs into the end connector.

Light distribution curve

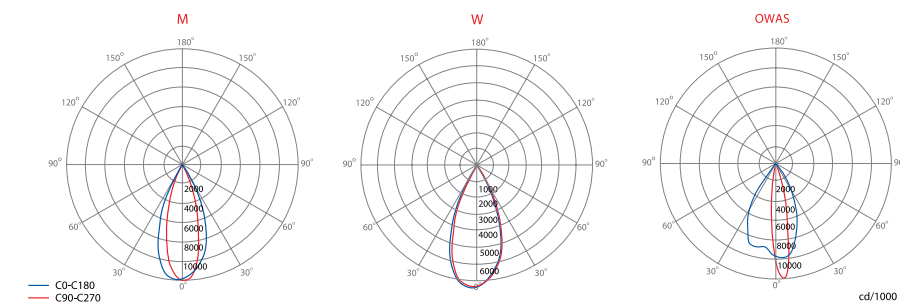

A luminaire order code: MIDIline / 2 400 - W4 (the light code) - OWAS ( the lens code) - GR/MM (the body colour code)