



Possible as bollard-type, and console-mounted (rotary attachment system)

- Light sources: White LED.
- Power supply / Ballast: Included in the scope of supply.
- Body material: Cast aluminium.
- Diffuser: Protective glass - tempered heat-and impact-resistant, thickness - 4 mm.
- Coating: Powder coated. Colour - anthracite RAL 7039.
- Connection: The max. section of the connected conductors is up to 4 mm². Electric shock protection class - 2.


Modern Soul LED



| Code | Power, W | Light flux, lm | Weight, kg |
|------------|----------|----------------|------------|
| SOUL 4LED | 32 | 4300 | 13,00 |
| SOUL 8LED | 64 | 8600 | 13,08 |
| SOUL 12LED | 96 | 12900 | 13,26 |
| SOUL 16LED | 128 | 17200 | 13,35 |
| SOUL 20LED | 160 | 21500 | 13,85 |
| SOUL 24LED | 192 | 25800 | 13,95 |

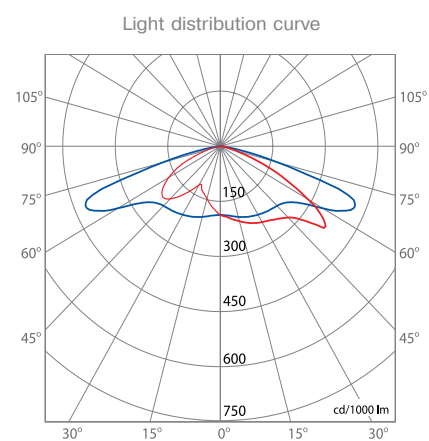


Luminous intensity diagrams, lx

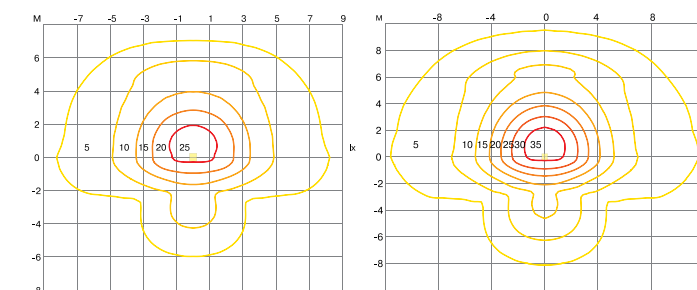

LED 12x1W

LED 24x1W

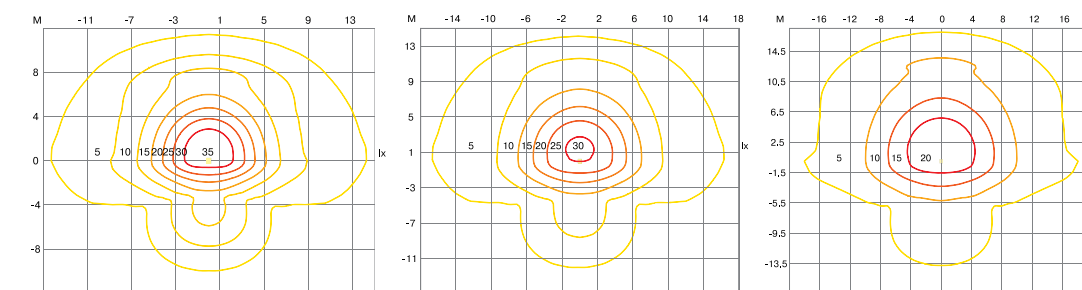

LED 36x1W

LED 48x1W

LED 60x1W