



Stalker Joker bollard




84

Ignis Repost



82

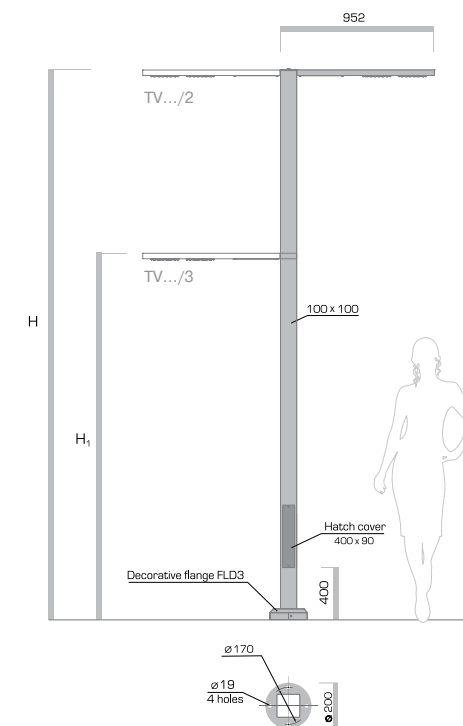


Light sources LED	Components Decorative flange FLD3 (ordered separately, p. 202).	Design Pole - steel. Luminaire - aluminium alloy. Available in two modifications: standard and M-modification (with increased power).
Cooling Powder coating in any colour from the standard colour range (p. 213)	Connection 220 V, 50 Hz The max. section of the connected conductors: 16 mm ² .	Additional information Base for installation - FM1 or A4 (p. 206-211). The base positioning with respect to the roadbed is given on p.207. Corrosion protection - HD galvanizing (the pole body).

Stalker Joker

ERC 220V IP65 LED 3000K 4000K

Code	H, m	H ₁ , m	Power, W	Luminous flux, lm	Weight, kg
TV40/1 3K(4K)	4,0	-	26,0	3476	44
TV40/2 3K(4K)	4,0	4,0	52,0	6951	47
TV50/1 3K(4K)	5,0	-	26,0	3476	53
TV50/2 3K(4K)	5,0	5,0	52,0	6951	56
TV60/1 3K(4K)	6,0	-	26,0	3476	62
TV60/2 3K(4K)	6,0	6,0	52,0	6951	65
TV60/3 3K(4K)	6,0	4,0	52,0	6951	65
M-modification					
TV40M/1 3K(4K)	4,0	-	53,0	6303	44
TV40M/2 3K(4K)	4,0	4,0	107,0	12605	47
TV50M/1 3K(4K)	5,0	-	53,0	6303	53
TV50M/2 3K(4K)	5,0	5,0	107,0	12605	56
TV60M/1 3K(4K)	6,0	-	53,0	6303	62
TV60M/2 3K(4K)	6,0	6,0	107,0	12605	65
TV60M/3 3K(4K)	6,0	4,0	107,0	12605	65
Code	H, m	H ₁ , m	Power, W	Luminous flux, lm	Weight, kg

Luminous intensity diagrams, lx

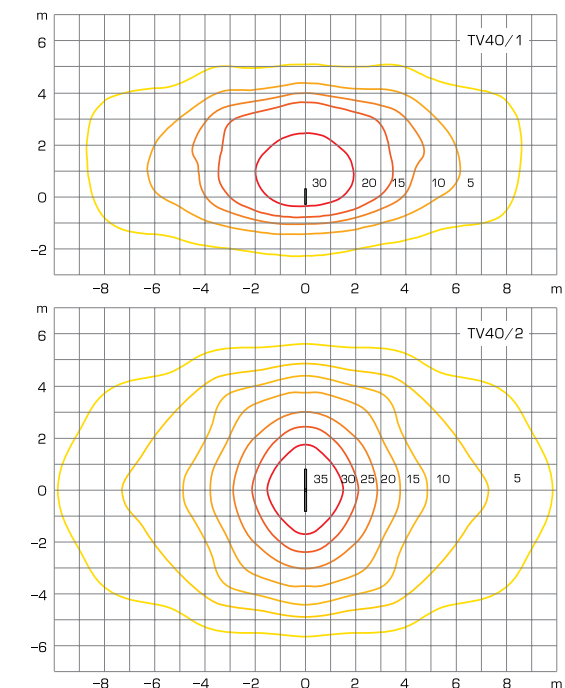

A pole order code consists of the product code - the product colour code from the standard colour range, for instance: TV40/2 3K - BLK/MT