

Light sources

Metal halide lamp of 70 or 150 W with a G12 base (emission colour – ND).

Components

Decorative flange FLD1.

Design

Aluminium alloy. Light source protection class- IP65.

Coating

Powder coating in any colour from the standard colour range (p. 213)

Connection

220 V, 50 Hz
The max.section of the connected conductors is up to 16 mm².

Additional information

Base for installation - FM1 or A4 (p. 206-211).

Atlantis Imatra




220V

IP65

Code	H, m	Power, W	Weight, kg
IM43 SM/70W	4,3	70	26
IM43 AS/70W	4,3	70	26
IM43 SM/150W	4,3	150	26
IM43 AS/150W	4,3	150	26

Luminous intensity diagrams, lx

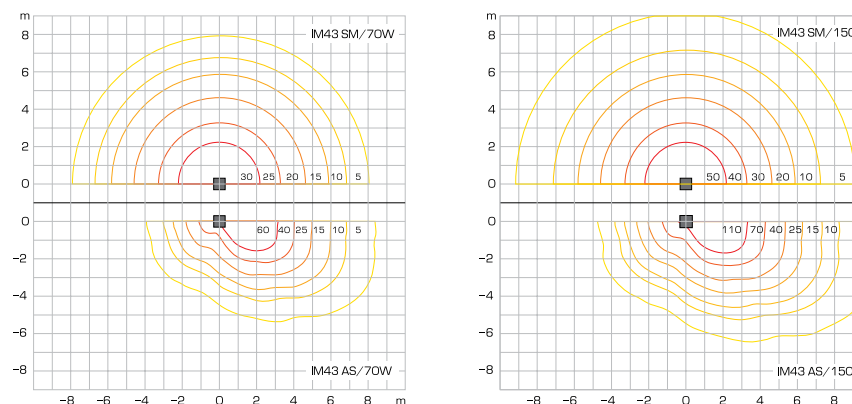

A pole order code consists of the product code - the product colour code from the standard colour range, for instance: IM43 SM/150W - GRAY/MR