

S-at	Connection	Additional information
Powder coating in any colour from the standard colour range (p. 213)	220 V, 50 Hz  The max. section of the connected conductors is up to 16 mm <sup>2</sup> .	Base for installation - FM1 o A4 (p. 206-211). Corrosion protection - HD galvanizing (the pole body).

Components

Decorative flange FLD1.

Light sources

Metal halide lamp of 70 or 150 W

with a G12 base (emission colour

## Atlantis Onega

EAC




Pole - steel. Reflector -

aluminium alloy. Light source protection class - IP65.



Code	H, m	Power, W	Weight, kg
ON/70W	4,2	70	65
ON/150W	4,2	150	65
Code	H, m	Power, W	Weight, kg



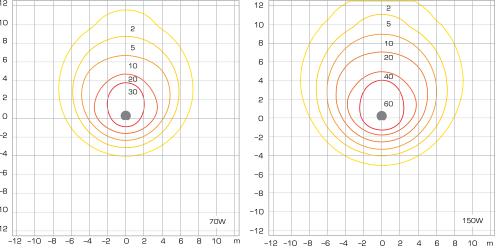

A pole order code consists of the product code - the product colour code from the standard colour range, for instance: ON/70W - BLK/MR