


SV30	3,0	-	108	' - '	-	31
SV30K	3,0	-	108	-	-	34
SV40	4,0	-	108	-	-	41
R SV40K	4,0	-	108	-	-	44
SV50	5,0	-	108	-	-	52
SV50K	5,0	-	108	-	-	56
SV60	6,0	-	108	-	-	62
Z20	2,0	0,8	108	60	-	17
Z30	3,0	1,0	108	60	-	21
Z30K	3,0	1,0	108	60	-	24
_{FH} Z40	4,0	1,0	108	60	-	25
Z40K	4,0	1,0	108	60	-	28
Z50	5,0	2,0	108	76	-	48
Z50K	5,0	2,0	108	76	-	51
Z60	6,0	2,0	108	76	-	51
SN40/4	4,0	-	108	-	500	36
SN40/5	4,0	-	108	-	600	38
IIS S32	3,2	1,0	108	60	-	30
S42	4,2	1,0	108	60	-	42
NOM40	4,0	-	108		-	27



Components	Design
Luminaires and brackets for the poles shall be ordered separately.	The poles are made of steel. A T-bracket for external lighting spotlights installation can be fitted onto SVIR and ZENIT poles.
Cooting Powder coating in any colour from the standard colour range (p. 213).	Fidditional informationBase FM1, A4 and FMB(p. 206-211) are used forpoles installation.Corrosion protection - HDgalvanizing (SVIR, ZENIT andSABONIS poles) or coatingwith a special polymerzinc-containing primer(SATURN and NOMAD poles).

A pole order code consists of the product code - the product colour code from the standard colour range, for instance: SN40/5 - BLK/MT

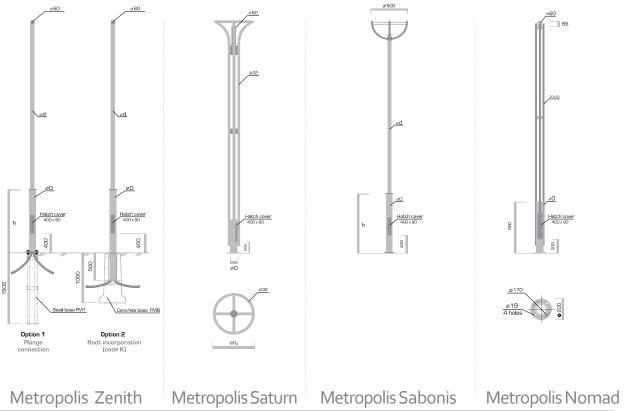

67

Poles