

Light sources
Metal halide light source or LED.

Design
Pole - steel. Luminaire bracket - aluminium alloy.

Cooling
Powder coating in any colour from the standard colour range (p. 213).

Connection
220 V, 50 Hz
The max. section of the connected conductors: 16 mm².


Additional information
Base for installation - FM3, FM4, FM-TP5 or type 4 (p. 206-211)
Corrosion protection - HD galvanizing (the pole base).

Stalker Nova

ERC 220V IP65 LED 3000K 4000K

Code	H, m	W, mm	Power, W	Luminous flux, lm	Weight, kg
NOV 4	4,0	297	150	-	56
NOV 5	5,0	357	150	-	62
NOV 4 3K(4K)	4,0	300	26	3476	56
NOV 5 3K(4K)	5,0	300	26	3476	62

Code	H, m	W, mm	Power, W	Luminous flux, lm	Weight, kg
NOV 4	4,0	297	150	-	56
NOV 5	5,0	357	150	-	62
NOV 4 3K(4K)	4,0	300	26	3476	56
NOV 5 3K(4K)	5,0	300	26	3476	62

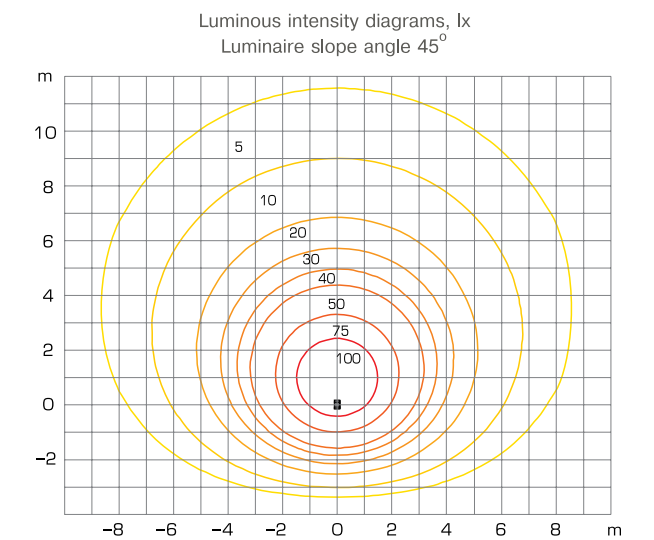

A pole order code consists of the product code - the product colour code from the standard colour range, for instance: NOV 5 - BLK/MT