


Components
 Supplied with the light source.
 Light source – LED with base
 GU10.

Design
 Bollard material - stainless
 steel.
 Protective glass – opal
 polycarbonate.
 Protection class - IP54.

Connection
 220 V, 50 Hz

Additional information
 Base ANK-N (see p. 206-211)
 is used for bollard installation
 (to be ordered separately).

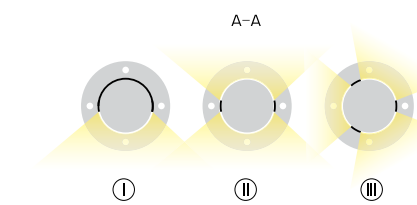

Cooling
 Powder coating in any
 colour from the standard
 colour range (p. 213).

Ignis Neon

ERC 220V IP54 LED 3000K 4000K

Code	Power, W	Color temperature	Light flux, lm	Weight, kg
TOR NEO/1(2) - I - 3K(4K)	лампа 5.5 вт	3000K(4000K)	104	2,3
TOR NEO/1(2) - II - 3K(4K)	лампа 5.5 вт	3000K(4000K)	190	2,3
TOR NEO/1(2) - III - 3K(4K)	лампа 5.5 вт	3000K(4000K)	190	2,3
BRA NEO/1(2) - 3K(4K)	лампа 5.5 вт	3000K(4000K)	190	1,8
Code	Power, W	Color temperature	Light flux, lm	Weight, kg

A bollard order code consists of the product code - the product colour code from the standard colour range, for instance:: TOR NEO/1-II-BLK/MM