


- Light sources:** High power LED
Secondary optics: polymer lenses
- Power supply:** Included in the scope of supply
- Body material:** Cast aluminium alloy.
Installation - on the wall, on the pole, on the ground.
Protection class - IP65.
- Diffuser:** Protective glass - tempered, thickness - 4 mm.
- Coating:** Powder coated. Body colours (basic) - black (additional code - B), white (additional code - W), or grey metallic RAL 9006 (additional code - M).
Coating in any colour from the standard colour range (p. 213) .
- Connection:** To a 220 V, 50 Hz network, via the terminal block installed in the body of the luminaire.
The max. section of the connected conductors is up to 4 mm².
Protection class - class 1.

Facade Accent




Code	Power, W	Luminous flux, lm	Weight, kg
MULT LED 3 3K\4K\A\R\G\B - N/M/W	3	357	0,5
MULT LED 4 3K\4K\A\R\G\B - N/M/W	4	476	0,5
MULT LED 5 3K\4K\A\R\G\B - N/M/W	6	595	0,5
MULT LED 6 3K\4K\A\R\G\B - N/M/W	7	714	0,5

- LED colour codes:**
3K - white 3000K
4K - white 4000K
5K - white 5000K
A - yellow
R - red
G - green
B - blue
- Lens light distribution codes:**
N - narrow 8-12°
M - medium 25-30°
W - wide 40-45°

Code	Power, W	Luminous flux, lm	Weight, kg
MULT LED 3 3K\4K\A\R\G\B - N/M/W	3	357	0,5
MULT LED 4 3K\4K\A\R\G\B - N/M/W	4	476	0,5
MULT LED 5 3K\4K\A\R\G\B - N/M/W	6	595	0,5
MULT LED 6 3K\4K\A\R\G\B - N/M/W	7	714	0,5

Light distribution curve

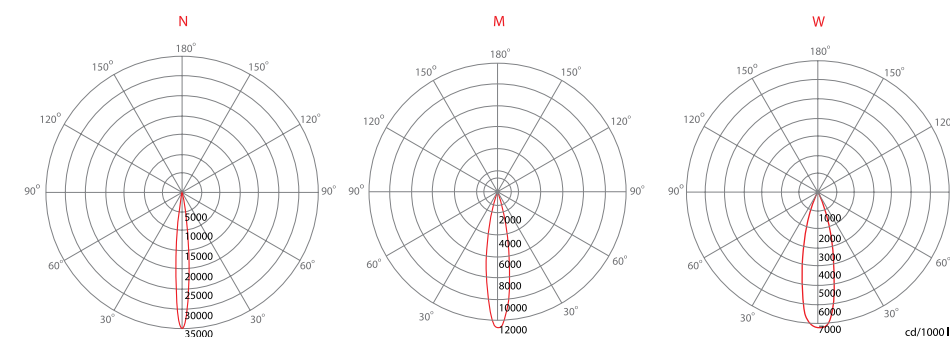

A luminaire order code consists of the product code - the product colour code from the standard colour range, for instance: MULT LED A - W - BLK/MM

Lenses light distribution
N M W



Installation of the MULTIK luminaire
on the pole for ground mounting

