

- Light sources:** LED with various emission colours.
Secondary optics - polymer lenses with various light distribution angles.
- Power supply / Ballast:** Included in the scope of supply.
- Design:** Body - extruded anodized aluminium coated with weather-resistant powder materials.
The luminaire without through wiring (type 1) is equipped with a 1-meter cable and a sealed connector (terminal block) for connection.
A modification with through wiring is also available (type 2). The through-wired modification is equipped with two cable cuts 200 mm long each and with one sealed connector for daisy chain.
LED pitch - 50 mm.
- Diffuser:** Protective glass - tempered heat-and impact-resistant, thickness - 4 mm.
- Coating:** Powder coated. Coating in any colour from the standard colour range (p. 213).
- Connection:** The max. section of the connected conductors is up to 4 mm². Electric shock protection class - 2.

Facade MidiLine M




Code	Max. Power, W	Luminous flux, lm 3000K\4000K\A\R\G\B	X, mm	Length, mm	Weight, kg
MIDIline M/1(2) 300 3K\4K\A\R\G\B - N/M/W/WW/O/OWAS	8	748\748\244\264\455\113	50	320	0,8
MIDIline M/1(2) 600 3K\4K\A\R\G\B - N/M/W/WW/O/OWAS	15	1496\1496\488\528\910\226	50	620	1,4
MIDIline M/1(2) 900 3K\4K\A\R\G\B - N/M/W/WW/O/OWAS	23	2244\2244\732\792\1365\339	50	920	2,0
MIDIline M/1(2) 1200 3K\4K\A\R\G\B - N/M/W/WW/O/OWAS	30	2992\2992\976\1056\1820\452	50	1220	2,5
MIDIline M/1(2) 1500 3K\4K\A\R\G\B - N/M/W/WW/O/OWAS	34	3740\3740\1220\1320\2275\565	50	1520	3,0

Code	Power, W	Luminous flux, lm	X, mm	Length, mm	Weight, kg
------	----------	-------------------	-------	------------	------------

LED colour codes:
 3K - white 3000K
 4K - white 4000K
 A - yellow
 R - red
 G - green
 B - blue

Lens light distribution codes:
 OWAS - flood asymmetrical
 O - elliptic optics 40x15°
 M - medium 30-32°
 W - wide 42-46°
 WW - extremely wide 60-62°

Installed using standard brackets G-CRON (Г-КРОН) (see p. 208, ordered separately).
 In case of through-wired luminaires installation, luminaire 1 shall be installed at the end of the circuit; otherwise, it is required to install special plugs into the end connector.

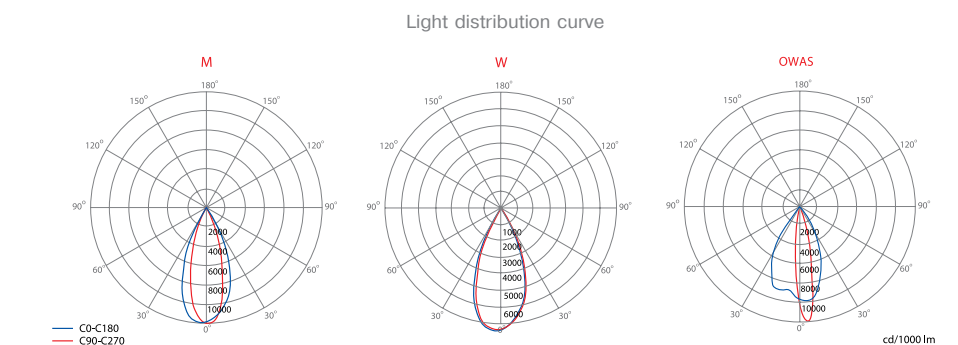

A luminaire order code : MIDIline M / 2 400 - 4K (the light code) - OWAS (код оптики) - GR/MM (the body colour code)