


- Light sources:** White LED (3000K, 4000K)
- Ballast:** The power source is included in the scope of supply.
- Design:** Aluminium alloy, ingress protection class - IP 65.
- Dome lamp material:** Transparent PET.
- Coating:** Polyether powder coating in any colour from the standard colour range.
- Connection:** The max. section of the connected conductors is up to 4 mm².
Electric shock protection class - 1.

Modern Nara



| Code | Power, W | Light flux | Weight, kg |
|-----------------|----------|------------|------------|
| NARA 40 3K(4K) | 40 | 4300 | 21 |
| NARA 84 3K(4K) | 84 | 7900 | 21 |
| NARA 112 3K(4K) | 112 | 11817 | 21 |

| Code | Power, W | Light flux | Weight, kg |
|------|----------|------------|------------|
| | | | |

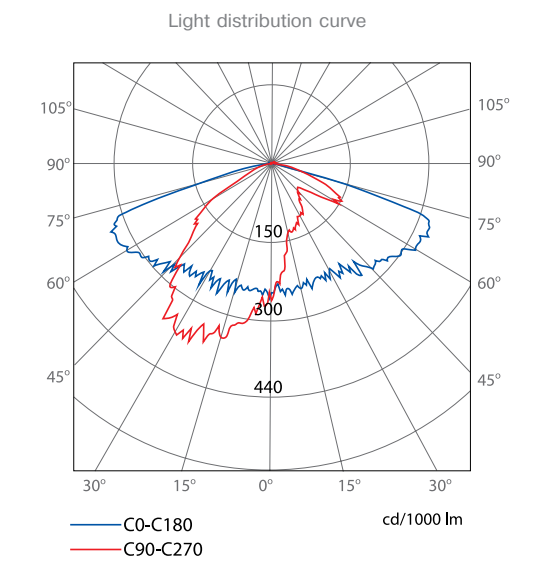

A luminaire order code consists of the product code - the product colour code from the standard colour range, for instance: NARA 84 4K - BLK/MT