


Light sources LED	Components Decorative flange FLD1.	Design Pole - steel. Luminaire bracket - aluminium alloy. Available in two modifications: standard and M-modification (with increased power)
Cooling Powder coating in any colour from the standard colour range (p. 213). The pole body and the bracket with the luminaire plane can have any colour coating (customized).	Connection 220 V, 50 Hz. The max. section of the connected conductors: 16 mm ² .	Additional information Base for installation - FM1 or A4 (p. 206-211). Corrosion protection - HD galvanizing (the pole body).

Stalker Parus 2

- 220V
- IP65
- LED
- 3000K
- 4000K

Code	H, m	Power, W	Luminous flux, lm	Weight, kg
PRS2 60 3K(4K)	6,3	78	10427	92
PRS2 60M 3K(4K)	6,3	160	18908	92

Code	H, m	Power, W	Luminous flux, lm	Weight, kg

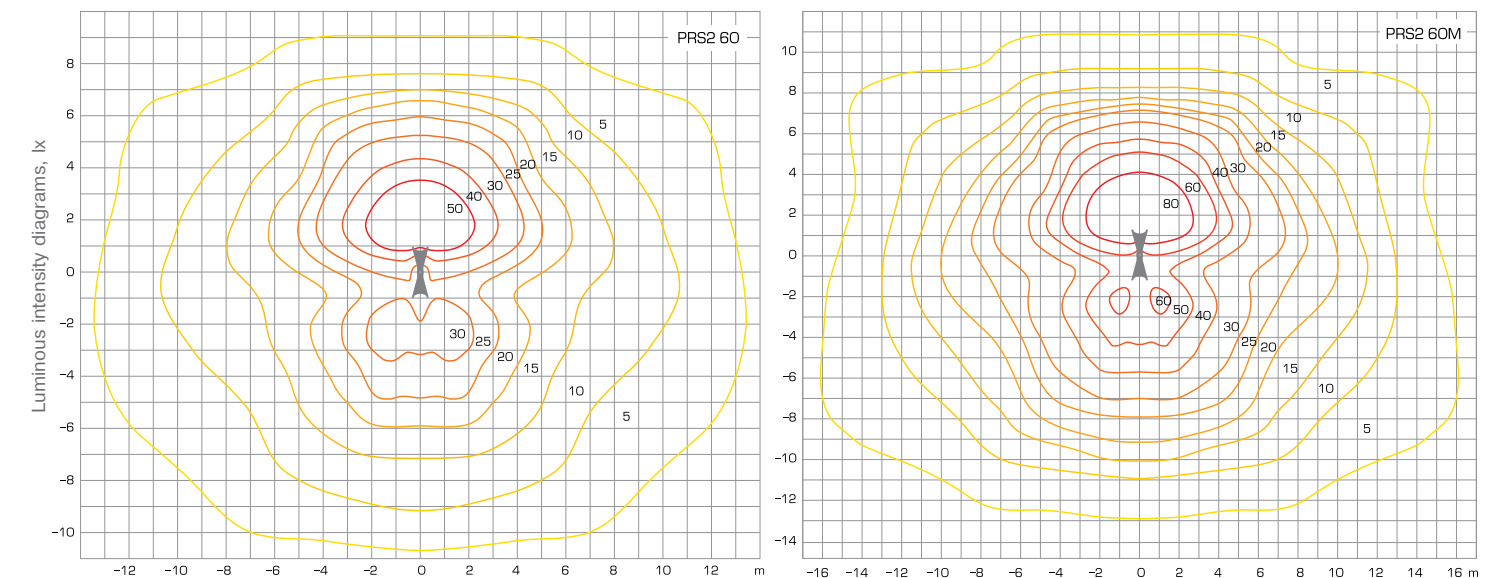

A pole order code consists of the product code - the product colour code from the standard colour range, for instance: PRS2 60M 4K - BLK/MR