

Coating
Powder coating in any colour from the standard colour range (p. 213). The pole body can have any colour coating (customized).

Connection
220 V, 50 Hz
The max. section of the connected conductors: 16 mm².

Additional information
Base for installation FM3, FM-TP5 or type 4 (p. 206-211)


Light sources
LED

Design
The pole is made of aluminium alloy. Available in two modifications: standard and M-modification (with increased power)

Stalker Sparta

ERC 220V IP65 LED 3000K 4000K

Code	H, m	Power, W	Luminous flux, lm	Weight, kg
SPA 4 3K(4K)	4,0	26	3476	40
SPA 4M 3K(4K)	4,0	52	6303	40
SPA 5 3K(4K)	5,0	26	3476	50
SPA 5M 3K(4K)	5,0	52	6303	50
SPA 6 3K(4K)	6,0	26	3476	60
SPA 6M 3K(4K)	6,0	52	6303	60

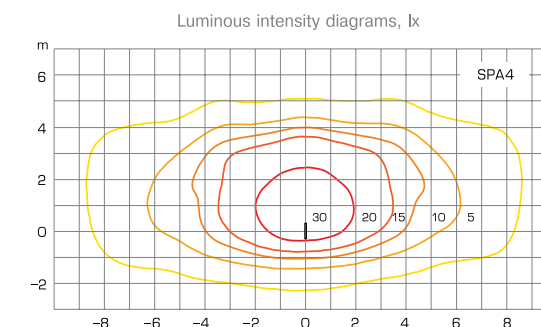

A pole order code consists of the product code - the product colour code from the standard colour range, for instance: SPA 5 4K - BLK/MT