

Light sources

LED

Design

Pole - steel. The dome lamp material - transparent polycarbonate.
Available in two modifications: standard and M-modification (with increased power).
SM, AS - symmetrical and asymmetrical diagrams.

Connection

220 V, 50 Hz

Additional information

Base for installation - F6-1500 (p. 206-211).
Corrosion protection - HD galvanizing.

Coating

Powder coating in any colour from the standard colour range (p. 213)

Ignis Replay 159



220V

IP65



LED

3000K

4000K

Code	H, m	L, mm	Power, W	Light flux, lm	Weight, kg
TRE159 30 SM(AS) 3K(4K)	3,0	650	41	4787(4935)	50
TRE159 40 SM(AS) 3K(4K)	4,0	650	41	4787(4935)	68
TRE159 50 SM(AS) 3K(4K)	5,0	1000	41	4787(4935)	84
TRE159 30M SM(AS) 3K(4K)	3,0	650	56	6208(6400)	50
TRE159 40M SM(AS) 3K(4K)	4,0	650	56	6208(6400)	68
TRE159 50M SM(AS) 3K(4K)	5,0	1000	56	6208(6400)	84

Code	H, m	L, mm	Power, W	Light flux, lm	Weight, kg
------	------	-------	----------	----------------	------------

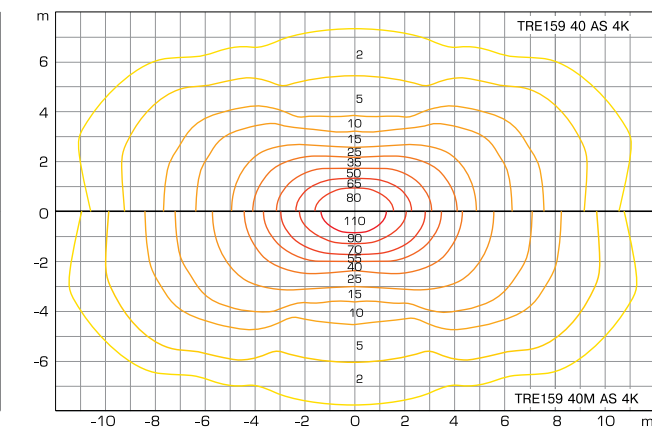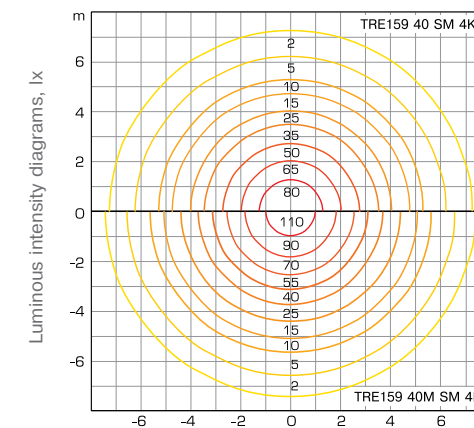

A bollard order code consists of the product code - the product colour code from the standard colour range, for instance: TRE159 40M SM 4K - BLK/MT